

Pre Amplifier RFPR506-957-A20

Features:

- Low Noise
- Economical
- Small & Rigid design

Description:

The RFPR506-957-A20 is a broadband, Ultra Low Phase Noise RF Amplifier for phase noise measurement of devices with low output power. This amplifier is also excellent for laboratory and manufacturing applications.

Applications:

- Small Signal Amplifier
- Cellular
- Communication
- Transmission Receiver
- VHF / UHF




Figure 2

Standard Accessories:

- USB Charger (5V, 2A) (Figure. 1)


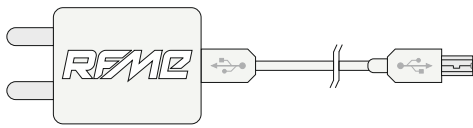


Figure 1

Optional Accessories:

- Attenuator Kit
- Directional Coupler Kit
- Antenna Kit
- Adapter Kit
- Filter Kit
- Cable as per user Requirement (Fig 2)

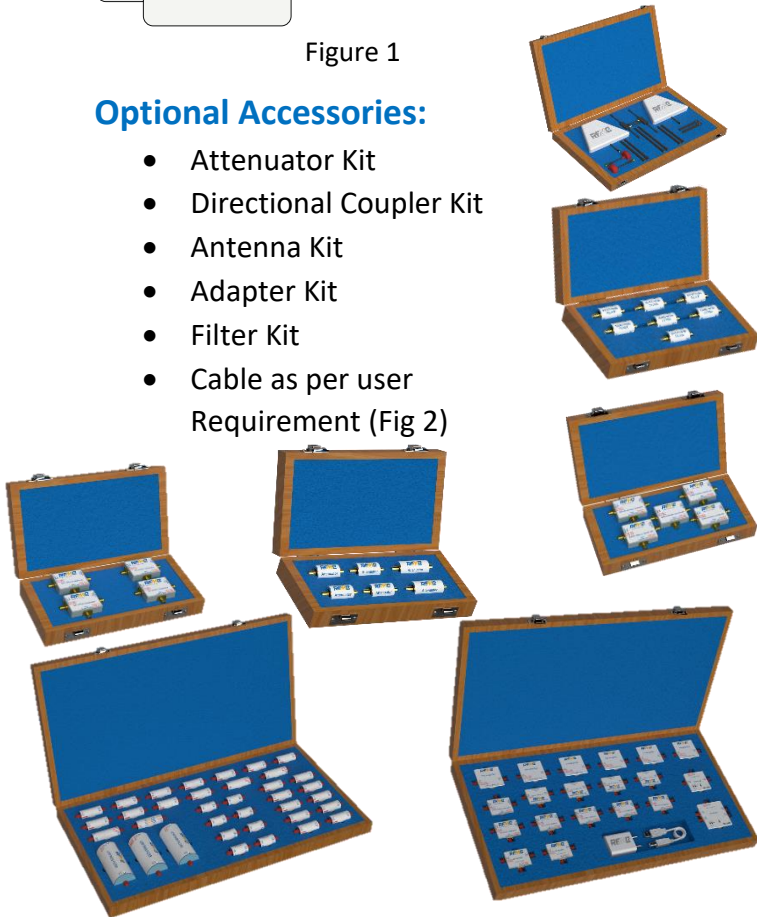


Electrical Specifications:

Frequency Range:	50 to 950MHz
Gain:	19 dB ± 2 dB
Input Power:	+5 dBm (Max.)
In/Out Impedance:	50 Ohm
Noise Figure:	Typical 2.5 dB
Operating temperature:	0 °C to 50 °C
Supply:	+5V To +5.5V DC
In/Out Connector:	SMA (F)
Power Consumption:	0.96 Watt (Max.)

Mechanical Specification:

Dimension :

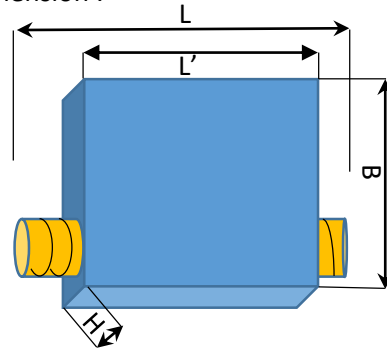

$$L = 65.4$$

$$L' = 46.4$$

$$B = 42.8$$

$$H = 16.9$$

Shape:

Rectangle
Cuboidal Shape

Weight:

80 gm

FREQUENCY VS GAIN

