

Pre Amplifier RFPRDC-608-A16

Features:

- Low Noise
- Economical
- Small & Rigid design

Description:

The RFPRDC-608-A16 is a broadband, Ultra Low Phase Noise RF Amplifier for phase noise measurement of devices with low output power. This amplifier is also excellent for laboratory and manufacturing applications.

Applications:

- GPS, PCS, GSM, Cellular
- Wireless Data
- High Dynamic Range
- Defense & Satellite Communication

Standard Accessories:

- USB Charger (5V, 2A) (Figure. 1)

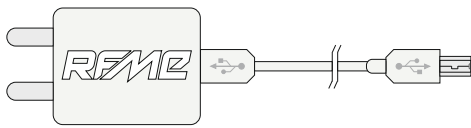


Figure 1




Figure 2




Electrical Specifications:

Frequency Range:	DC to 6 GHz
Gain:	14 dB ± 2 dB
Input Power:	+5 dBm (Max.)
In/Out Impedance:	50 Ohm
Noise Figure:	Typical 1.1 dB
Operating temperature:	0 °C to 50 °C
Supply:	+5V To +5.5V DC
In/Out Connector:	SMA (F)
Power Consumption:	0.96Watt (Max.)

Mechanical Specification:

Dimension :

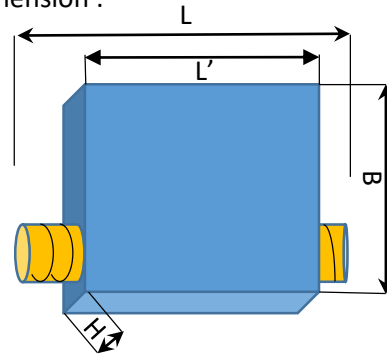


L = 65.4
L' = 46.4
B = 42.8
H = 16.9

Shape:	Rectangle Cuboidal Shape
Weight:	80 gm

Optional Accessories:

- Attenuator Kit
- Directional Coupler Kit
- Antenna Kit
- Adapter Kit
- Filter Kit
- Cable as per user Requirement (Fig 2)

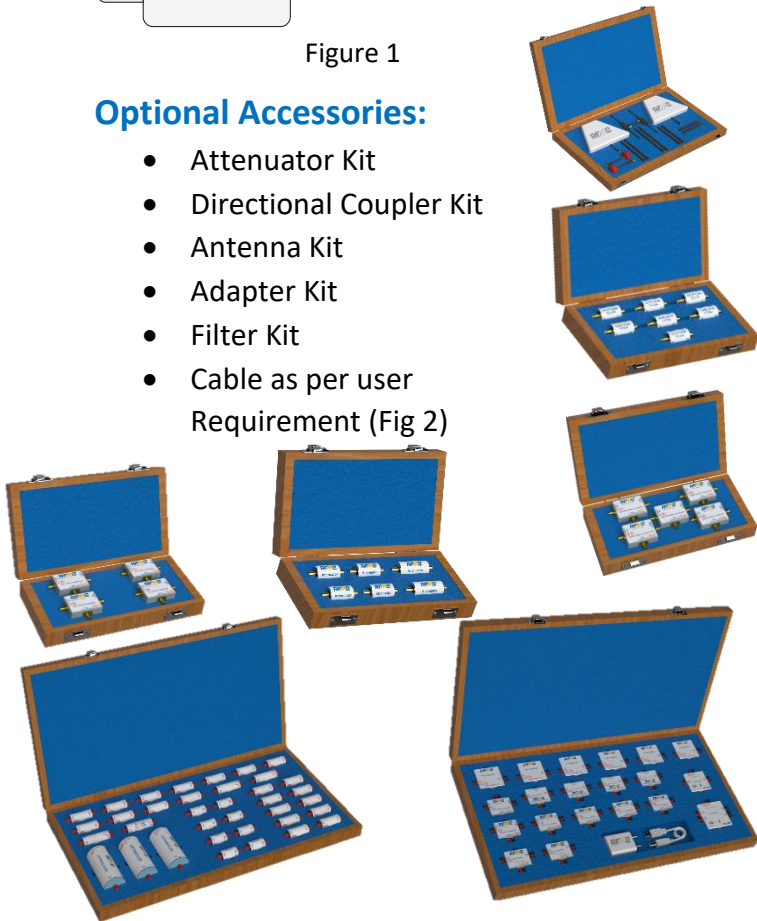

FREQUENCY VS GAIN

